


## FC SERIES

**Concrete Processor** 

- Narrow Stick body for improved visibility
- Removable isolated bottom cover provides exceptional access to all serviceable components

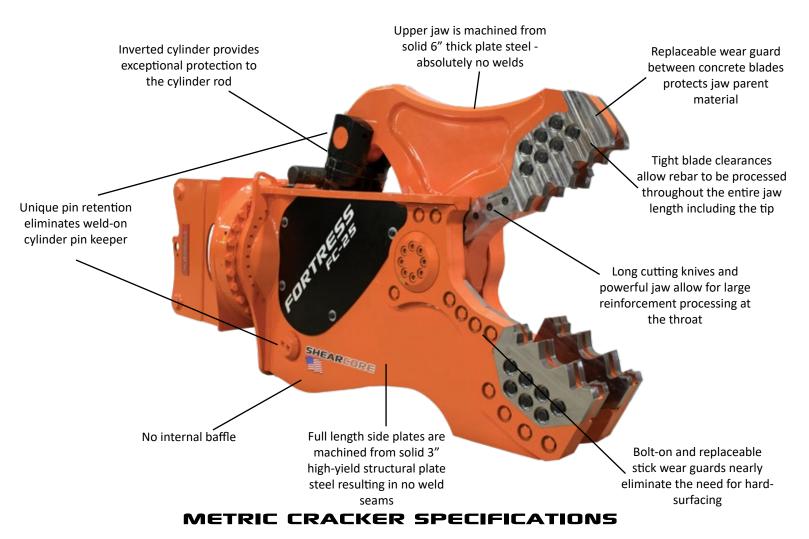

Model	Shear Weight (kg.)	Jaw Opening (mm.)	Jaw Depth (mm.)	Reach (mm.)	Minimum Excavator 2nd Member Mount (Metric Tons)	Minimum Excavator 3rd Member Mount (Metric Tons)
FC25	2,767	813	772	2,235	14	20
FC35	3,946	1,067	960	2,845	18	30
FC45	4,627	1,336	1,105	3,146	27	41