


FORTRESS™

BY SHEARCORE

PRIMARY DEMOLITION REDEFINED

The Fortress Demolition Shear is a very powerful attachment purpose built for crushing and processing concrete in both primary and secondary demolition. The FC offers unmatched power all the way out to the tip.

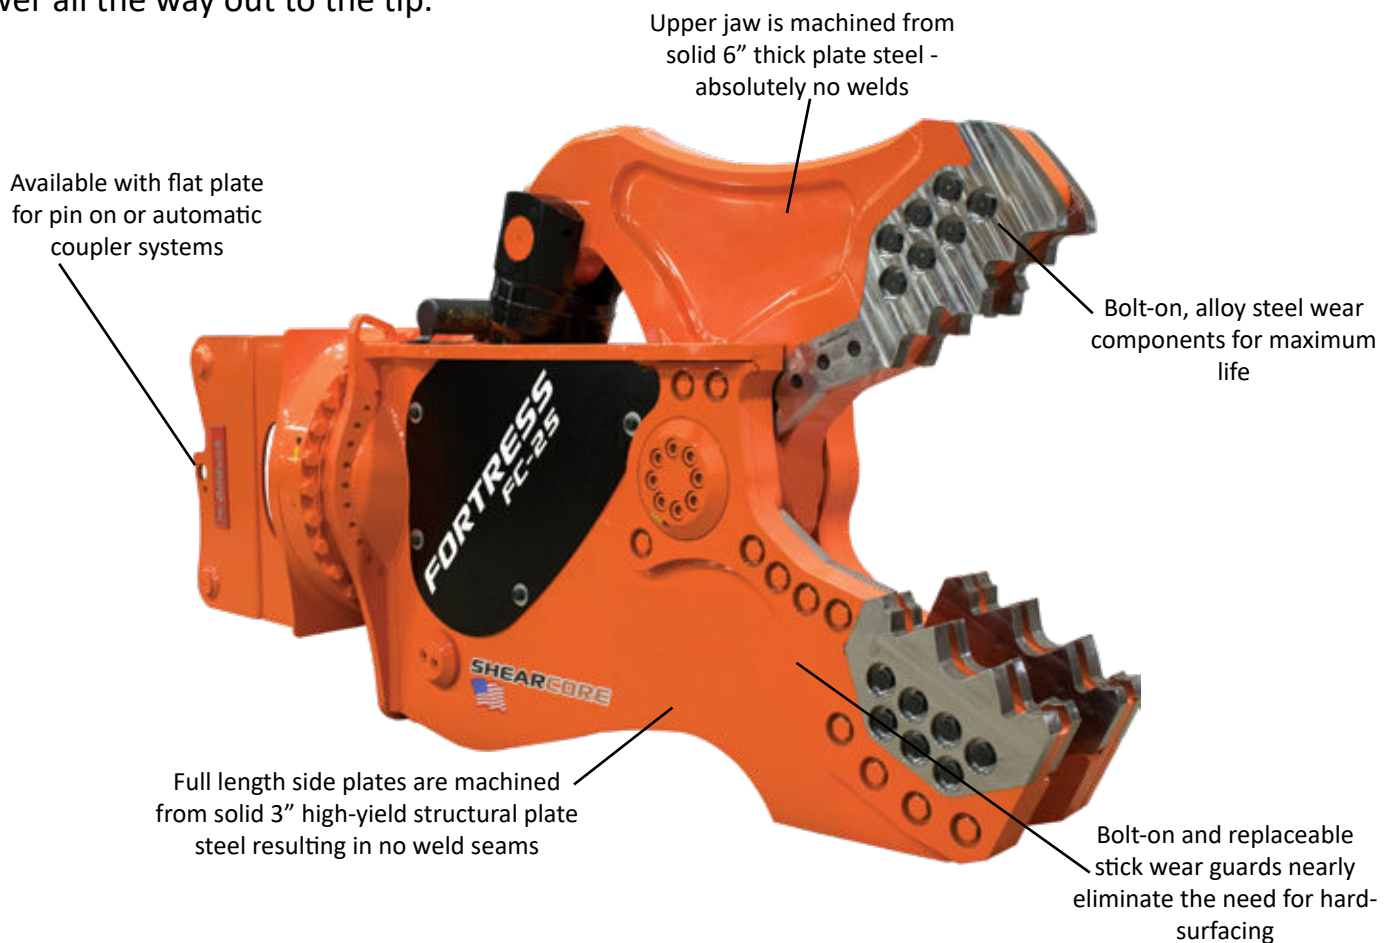

Why call it a Demolition Shear? The Fortress FC is a new class of tool with unique construction and capabilities. It utilizes a solid upper with no welds and press-fit pivot group (like our shears) allowing for tolerances tight enough to shear rebar all the way out to the tip.

FC DEMOLITION SHEARS



The FC can be installed on a variety of carriers; everything from smaller excavators up to massive high reach demo machines. Demolition shears are rated for up to 5500 psi.

Our factory experts will work directly with your excavator manufacturer and/or your local equipment dealer to ensure maximum performance.

DEMOLITION SHEAR SPECIFICATIONS

Model	Approx. Attachment Weight (lbs.)	Jaw Opening (in.)	Jaw Depth (in.)	Reach	Minimum Excavator 2nd Member Mount (lbs.)	Minimum Excavator 3rd Member Mount (lbs.)
FC25	6,100	32	30	7' 4"	30,000	45,000
FC35	8,700	42	38	9' 4"	40,000	66,000
FC45	10,200	53	44	10' 4"	60,000	90,000
FC95	21,000	65	64	13' 7"	105,000	185,000

Weights may vary depending on configuration options. Listed weight is typical flat top without bracket.