


FORTRESS™

BY SHEARCORE

PRIMARY DEMOLITION REDEFINED

The Fortress Demolition Shear is a very powerful attachment purpose built for crushing and processing concrete in both primary and secondary demolition. The FC offers unmatched power all the way out to the tip.

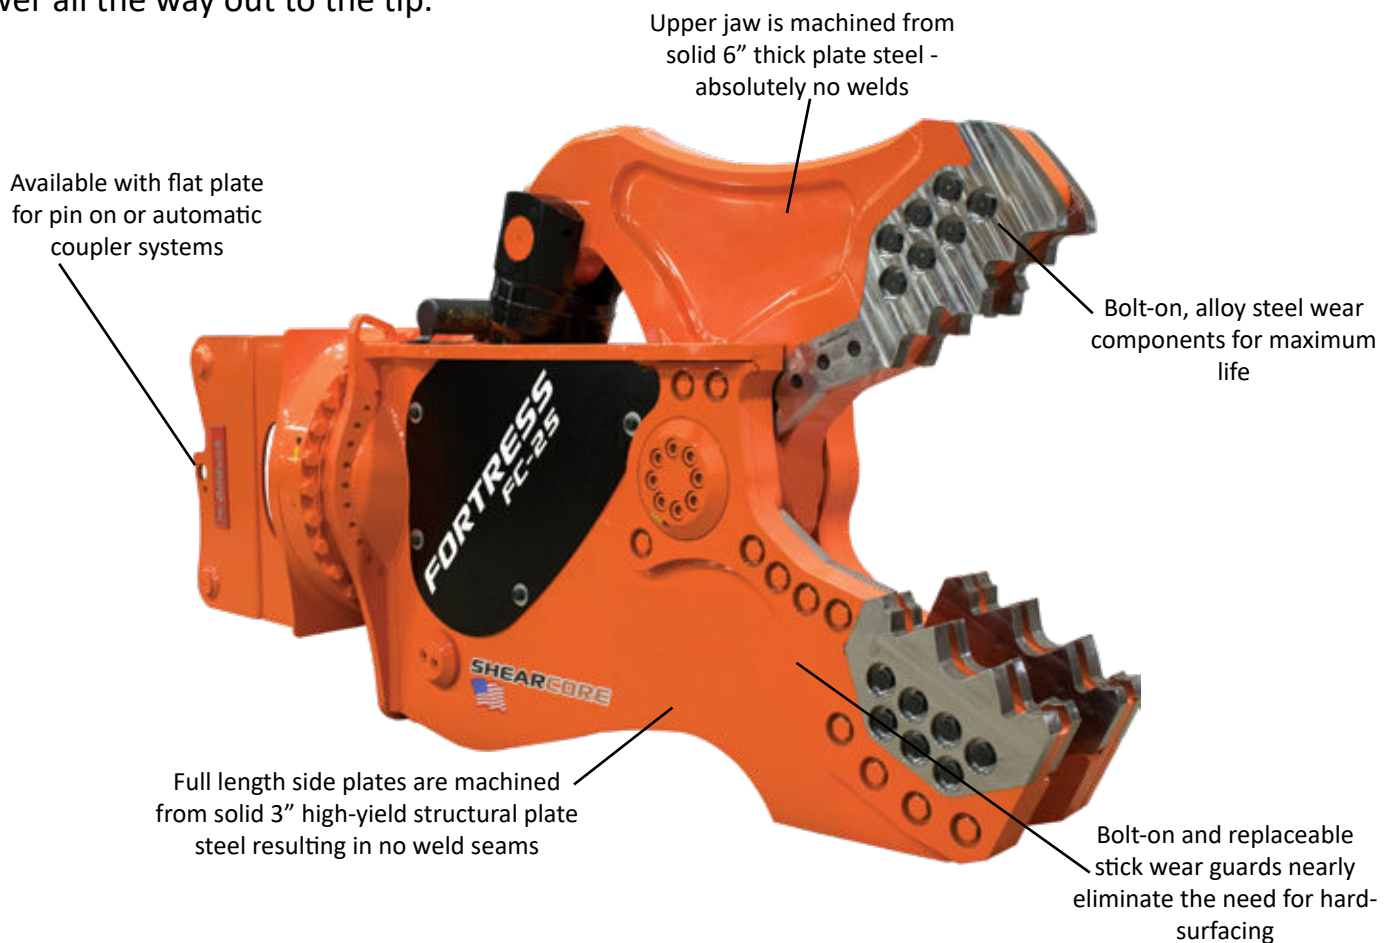

Why call it a Demolition Shear? The Fortress FC is a new class of tool with unique construction and capabilities. It utilizes a solid upper with no welds and press-fit pivot group (like our shears) allowing for tolerances tight enough to shear rebar all the way out to the tip.

FC DEMOLITION SHEARS



The FC can be installed on a variety of carriers; everything from smaller excavators up to massive high reach demo machines. Demolition shears are rated for up to 5500 psi.

Our factory experts will work directly with your excavator manufacturer and/or your local equipment dealer to ensure maximum performance.

DEMOLITION SHEAR SPECIFICATIONS - METRIC

Model	Shear Weight (kg.)	Jaw Opening (mm.)	Jaw Depth (mm.)	Reach (mm.)	Minimum Excavator 2nd Member Mount (Metric Tons)	Minimum Excavator 3rd Member Mount (Metric Tons)
FC25	2,767	813	772	2,235	14	20
FC35	3,946	1,067	960	2,845	18	30
FC45	4,627	1,336	1,105	3,146	27	41
FC95	9,525	1,651	1,626	4,140	47	84

Weights may vary depending on configuration options. Listed weight is typical flat top without bracket.